



# ASSEMBLING THE OMNI BC

**1** Attach the male shoulder connector into the female connector on the top of the harness. It will click into place when installed properly. Repeat for other side.

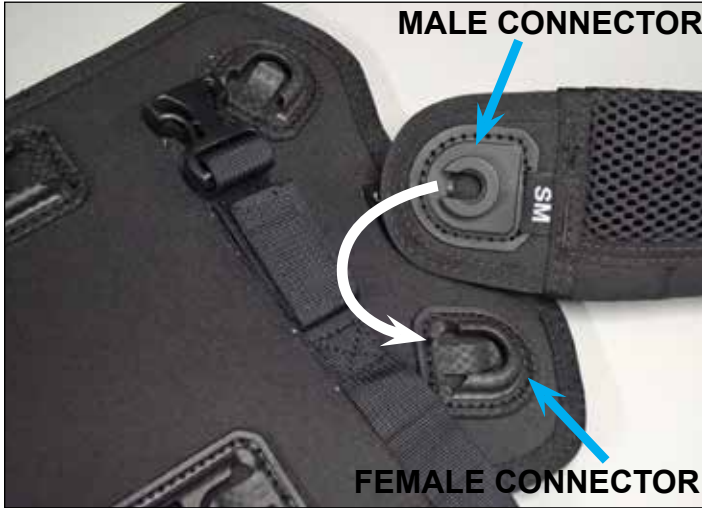

**2** Attach the male waistband connector into female connector on the bottom of the harness. **Confirm the curved part of the waistband is facing downward toward the hip**. Repeat for other side.

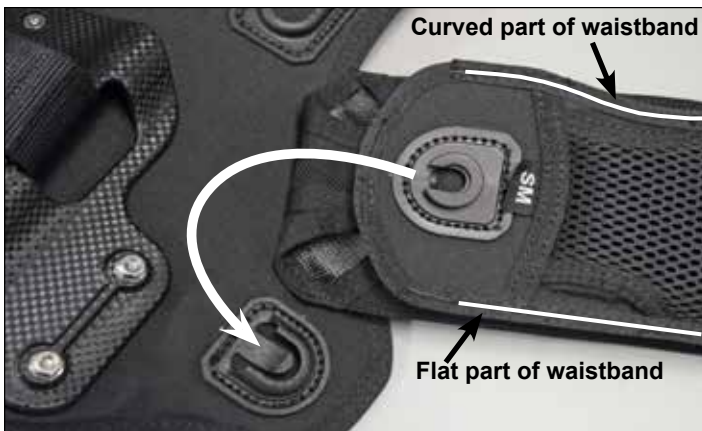

**3** Open and separate the Grip-Lock tank buckle and the hook & loop from the upper tank attachment.



Lay the aircell on top of the harness. Thread the tank band and the upper tank attachment strap through the slots in the aircell.



Re-fasten all buckles and the hook & loop.



**4** Turn the BC over, thread the T-shaped webbing end downwards thru the slide on the shoulder until it is captured. Repeat for other side.



**5** Thread the T-shaped webbing end upwards thru the slot on the bottom of the backpack until it is captured.



**6** Fasten the buckle on the waistband. Attach the male connector on the aircell lobe into the female connector on the waistband. Repeat for the other side.



**CONTINUED ON OTHER SIDE**



**7** Thread the T-shape end of the strap on the upper part of the aircell lobe through the waistband and into the slide on the bottom of the aircell. Repeat for the other side.



**8** Fasten the swivel shoulder buckle. Repeat for the other side.



**9** Fasten the twist lock for the right shoulder pull dump.



# INSTALLING THE OMNI COLOR KIT

1 Open the mesh bag and remove the color kit components.



2 Wrap the hook & loop retaining flap on the bottom of the backpad around the bottom of the harness. Affix the mid back hook & loop connections. Tuck the backpad under the flap on the top of the harness.



3 Attach the octo-pocket to the 2-grommets above the zippered pocket. Place the 2-screws through the grommet, place the pocket over the screws and then install the nuts. Tighten until snug. Repeat on the other side with the console pocket.



**4** Attach the chest strap to the shoulder strap by sliding the strap clip onto the shoulder rail. Repeat on other side. Adjust height for fit/preference.



**6** Slide the inflator hold-down through the shoulder strap. Affix the hook & loop retainers that hold the strap in position. Wrap the hold down around the inflator.



**5** Attach the zipper pulls to the 4-pocket zipper sliders by passing the cord through the hole in the slider and then passing the rubber pull through the hole in the cord.



**7** Slide the SureLock weight pouches into the waistbands listening for the locking click when correctly installed.